


AQUAPURA MONOBLOC WALL

DOMESTIC
HOT WATER



**AEROTHERMAL
HEAT PUMP**
ERGONOMIC,
EFFICIENT
AND SILENT.



HEAT PUMPS

FOR DOMESTIC WATER HEATING WITH WALL APPLICATION

 PORTUGUESE MANUFACTURING



EQUIPMENT

- Portuguese technology and production
- Stainless steel compact heat pump
- Various modes:
 - Eco, Comfort, Overboost and Disinfection
- Hot water up to 60°C in HP mode
- Silent
- Capacity of 120 liters
- Touch controller
- Wi-Fi control (optional)
- Easy to install and setup
- No maintenance
- Wall installation
- Integration in small spaces and areas, 60x60 cm module.
- Built with polymer materials
- Stronger
- ModBus management (optional)



SILENT



INSTALLATION
100%
HYDRAULIC



See warranty conditions

VARIOUS OPERATION MODES

WIFI CONTROL

- 1 ON/OFF equipment
- 2 Keyboard unblock | Access program | Check
- 3 Select working mode | Decrease values
- 4 Activate defrosting cycle | Increase values




TECHNICAL DATA		MONOBLOC 120L	MONOBLOC 160L
Type of equipment	-	Air/Water Heat Pump for DHW	
Nominal capacity	L	114	152
Unladen weight	Kg	43	53
Dimensions (Ø/height)	-	Ø530 / 1350	Ø530 / 1520
Cylinder material	-	Stainless steel	Stainless steel
Polyurethane insulation	mm	50mm	50mm
Max running temperature	°C	80	80
Max working pressure	bar	7	7
Test pressure	bar	10	10
Thermal loss	bar	0,95	0,98
Protection index	-	IPX1	IPX1
Power supply	-	220-240 Vac / single-phase / 50 Hz	
Power consumed HP (average-max)	W	250 / 350	250 / 350
Absorbed power electrical support	W	1500	1500
Electrical power supplied (HP)	W	1550	1550
Maximum consumption current	A	1,6 + 6,8 (with electric support)	
Max temperature DHW (HP)	°C	60	60
Max temperature DHW (support)	°C	70	70
Refrigerant fluid	- / Kg	R134a / 0,7	R134a / 0,7
Consumption profile	-	M	L
COP ¹	-	2,8	3,6
Heating time ¹	HH:mm	05:30	6:50
Useful water quantity at 40°C	L	139	192
Energy efficiency class ¹	-	A+	A++
Energy-efficiency ¹	%	117	151
Annual electric consumption	kWh / year	438	679
Ambient temperature limits	°C	-5 / 40	-5 / 40
Indoor sound pressure ²	dB(A)	49	49
Sound pressure at 2m	dB(A)	34	34
Air flow	m ³ / h	195	195
Static pressure of fan	Pa	60	60
Max. distance of pipes	m	20	20

¹ A14/W10-54, in accordance with EN16147 and Delegated Regulation (EU) N°812/2013 ² In accordance with EN12102

DIMENSIONS mm	MONOBLOC 120L	MONOBLOC 160L
1	1350	1520
2	825	905
3	720	750
4	220	220
5	Ø530	Ø530
6	100	100
7	550	550
8	Ø125	Ø125
9	Ø150	Ø150
Q	3/4" M	3/4" M
F	3/4" M	3/4" M

Equipment: **MONOBLOC 120L | 160L**

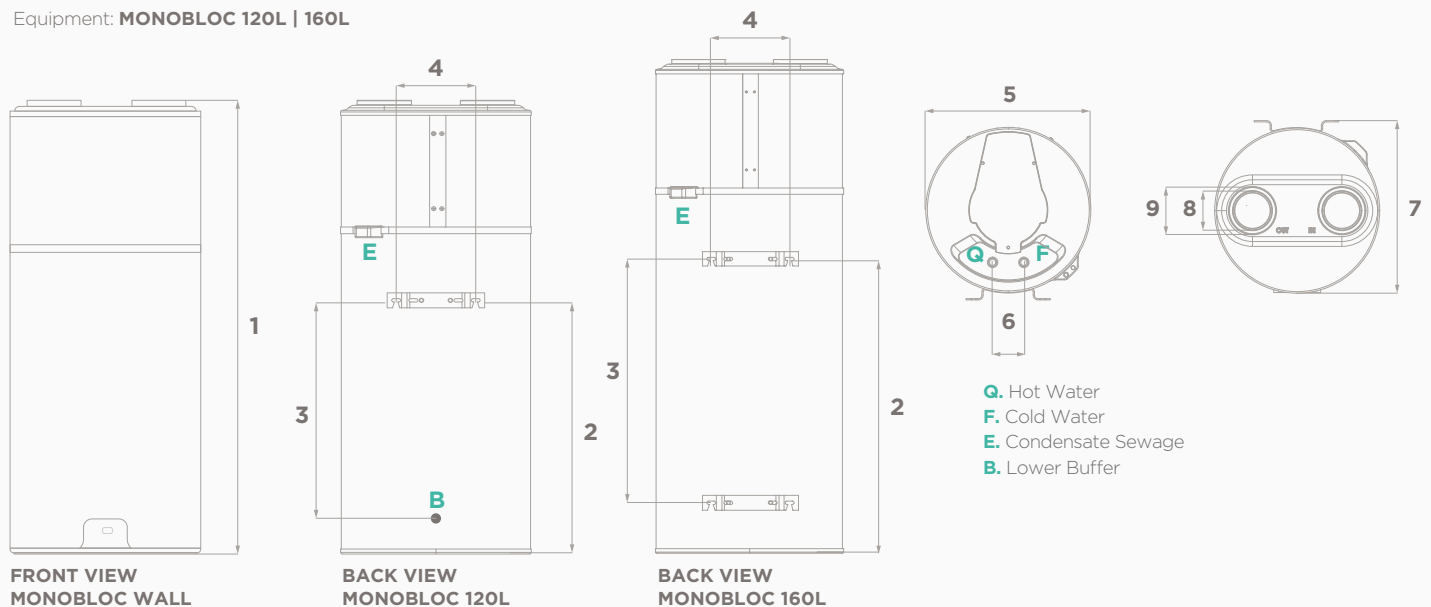

This flyer has been created for information purposes only and does not constitute a contractual offer for ENERGIE EST Lda. ENERGIE EST Lda. has compiled the contents of this flyer to the best of its knowledge. No express or implied guarantee is given regarding the completeness, accuracy, reliability or fitness for a particular purpose of its content and the products and services it presents. Specifications are subject to change without notice. ENERGIE EST Lda. explicitly rejects any direct or indirect damages, in its broadest sense, resulting from or related to the use and/or interpretation of this flyer. ROVO/2024



Project co-financed by:



Zona Industrial de Laúndos
Lote 48, 4570-311 Laúndos
Póvoa de Varzim, Portugal
EMAIL energie@energie.pt
SITE www.energie.pt

Follow us on:
ENERGIE PORTUGAL

Authorized dealer