

THERMOBOX DUO

HEAT PUMP
INDOOR
MODULE

**HEAT PUMP
INDOOR MODULE**

PLUG AND PLAY SOLUTION
THAT COMBINES A BUFFER
TANK AND DOMESTIC HOT
WATER CYLINDER IN
A SINGLE UNIT.



A NEW PLUG & PLAY SOLUTION

Not all the energy generated by the heat pumps gets used immediately. In this case, it makes sense to store the heat generated from renewable energy sources efficiently with the lowest possible heat losses. That makes heat storage an important component of any heating system. The THERMOBOX DUO is an efficient time and space saving solution to couple with your heat pump that includes a DHW and Buffer Cylinder. Comes with all components required for a fast Plug and Play solution, reducing installation time, costs and ensuring a correct installation.

 **PORTUGUESE MANUFACTURING**



100% HYDRAULIC INSTALLATION

THERMOBOX DUO stands out for its simple and easy installation process (Plug and Play), 100% hydraulic and without handling fluorinated gases.

The two types of storages are kept separate from one another, making possible to use the buffer tank for cooling during the summer.



ERGONOMIC AND COMPACT


THERMOBOX DUO interior unit was built with special regard for the space and area it takes inside the house, as well as the visual impact it causes. Allows for an easy integration, considering its reduced dimensions (60x60 cm).

Is the ideal solution if you don't have much space available and you still want to have an efficient and environmentally friendly storage system.

MULTIFACETED RANGE



The THERMOBOX DUO range has available several models developed considering all types of housing, namely single and multifamily constructions.

Models 160/50 and 200/50 are the ideal solutions for various construction projects, meeting Heating & Cooling and Domestic Hot Water needs (DHW).

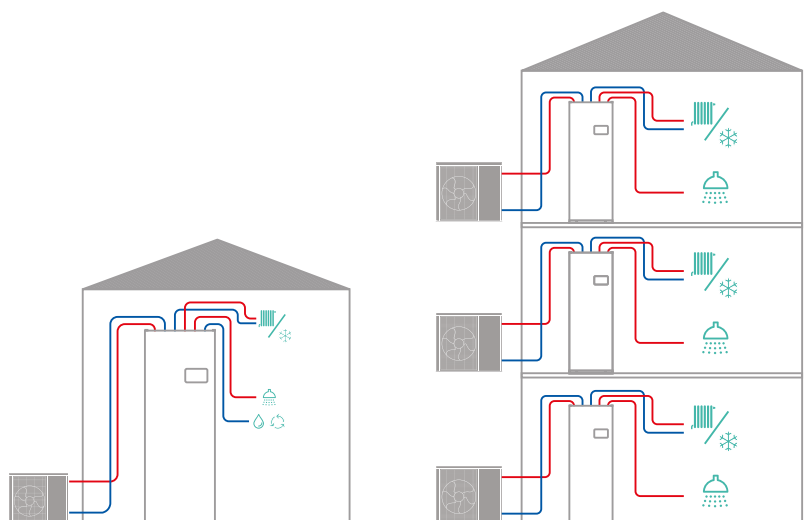

TECHNICAL DATA		THERMOBOX DUO 160/50		THERMOBOX DUO 200/50
Working modes		-	Heating/Cooling/DHW	
Unit management		-	LCD Display	
DHW cylinder		L	160	180
	Energy efficiency class	-	B	
Buffer tank		L	50	50
	Energy efficiency class	-	B	
Type of cylinder		-	Stainless Steel 444	
Thermal insulation	Type	-	High density polyurethane	
	Thickness	mm	50	
	Thermal conductivity	W/m.k	0,025	
Electrical backup	DHW immersion heater	W/A	1500 / 6.5	
	Buffer tank immersion heater	W/A	(Optional)	
	Voltage	V-/Hz	230 / 50	
Dimensions & weight	Dimensions	mm	1950x600x600	
	Weight	Kg	163	
Water circuit	Maximum temperature	°C	80	
	DHW expansion vessel	L	5	
	Central heating expansion vessel	L	8	
	DHW safety valve	Bar	7	
	Central heating safety valve	Bar	3	
	Coil surface area	m²	1,6	
	Circulation pump head	m	8	
	Drain	Ø/mm	14	
	Heat pump connections	Ø	1" M	
	Central heating connections	Ø	1" M	
	DHW connections	Ø	3/4" M	

Equipment: **Thermobox Duo**

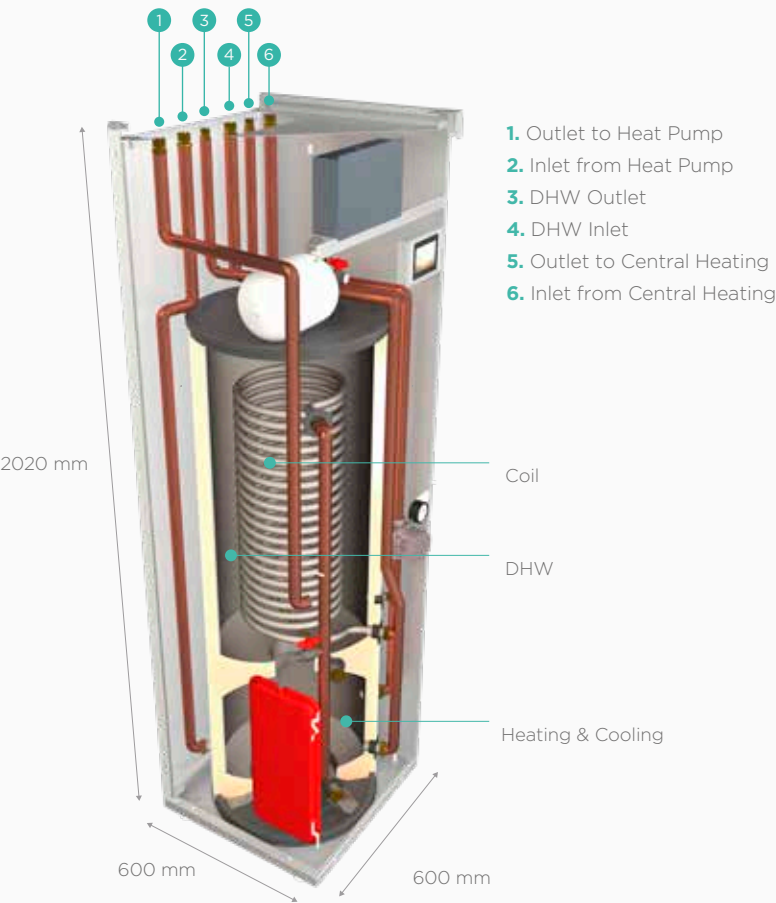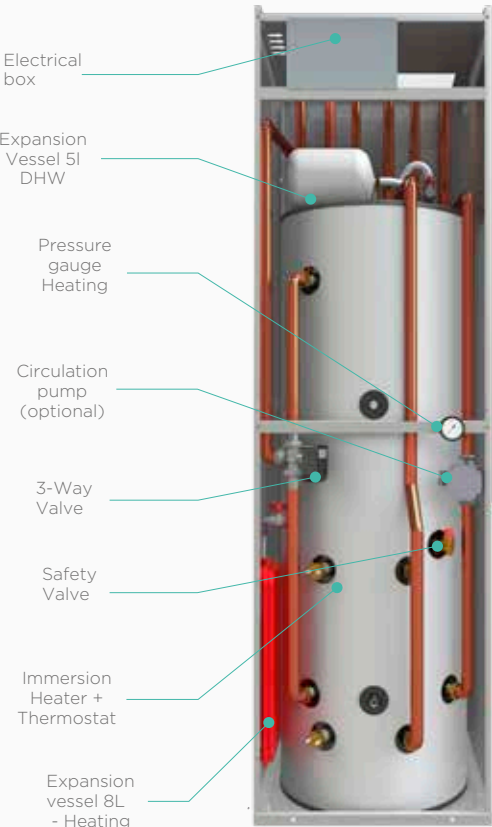

This flyer has been created for information purposes only and does not constitute a contractual offer for ENERGIE EST Lda. ENERGIE EST Lda. has compiled the contents of this flyer to the best of its knowledge. No express or implied guarantee is given regarding the completeness, accuracy, reliability or fitness for a particular purpose of its content and the products and services it presents. Specifications are subject to change without notice. ENERGIE EST Lda. explicitly rejects any direct or indirect damages, in its broadest sense, resulting from or related to the use and/or interpretation of this flyer. RIVO/2024



Project co-financed by:

NORTE2020
PROGRAMA OPERACIONAL REGIONAL DO NORTE

PORTUGAL
2020

UNIÃO EUROPEIA
Fundo Europeu
Estrutural e de Investimento



Zona Industrial de Laúndos
Lote 48, 4570-311 Laúndos
Póvoa de Varzim, Portugal
EMAIL energie@energie.pt
SITE www.energie.pt

Follow us on:
ENERGIE PORTUGAL
   

Authorized dealer